

# Incremental encoders

Blind or through hollow shaft  $\varnothing 12$  mm  
10...5000 pulses per revolution

## BHF, BHG



BHF with blind hollow shaft

### Features

- Encoder with blind or through hollow shaft  $\varnothing 12$  mm
- Optical sensing method
- Max. 5000 pulses per revolution
- Small profile depth
- Versatile mounting accessories

### Technical data - electrical ratings

Voltage supply	5 VDC $\pm 10$ % 10...30 VDC 4.5...30 VDC
Consumption typ.	80 mA (5 VDC, w/o load) 180 mA (4.5 VDC, w/o load) 60 mA (24 VDC, w/o load)
Pulses per revolution	10...5000
Reference signal	Zero pulse, width 90°
Sensing method	Optical
Output frequency	$\leq 750$ kHz
Output signals	A 90° B, N + inverted
Output stages	Antivalent Push-pull short-circuit proof Push-pull antiv. short-circuit proof
Interference immunity	DIN EN 61000-6-2
Emitted interference	DIN EN 61000-6-3
Approval	UL approval / E217823

### Technical data - mechanical design

Size (flange)	$\varnothing 58$ mm
Protection DIN EN 60529	IP 42, IP 65
Operating speed	$\leq 12000$ rpm (IP 42) $\leq 6000$ rpm (IP 65)
Operating temperature	-20...+85 °C
Relative humidity	95 % non-condensing
Resistance	DIN EN 60068-2-6 Vibration 10 g, 10-200 Hz DIN EN 60068-2-27 Shock 50 g, 11 ms
Connection	Connector M23, 12-pin Cable 2 m
Weight approx.	300 g

### BHF

Shaft type	$\varnothing 12$ mm (blind hollow shaft)
Operating torque typ.	0.009 Nm (IP 42) 0.037 Nm (IP 65)
Materials	Housing: aluminium Housing: steel (connection -5) Flange: aluminium

### BHG

Shaft type	$\varnothing 12$ mm (through hollow shaft)
Operating torque typ.	0.0175 Nm (IP 42) 0.047 Nm (IP 65)
Materials	Housing: aluminium Flange: aluminium

# Incremental encoders

## Blind or through hollow shaft $\varnothing 12$ mm

### 10...5000 pulses per revolution

BHF, BHG

#### Part number

##### Blind hollow shaft

BHF 16. 

		-		
--	--	---	--	--

	5	Connection Cable 2 m, radial
	A	Connector M23, radial
		<u>Blind hollow shaft</u>
	12	$\varnothing 12$ mm, IP 42
	B2	$\varnothing 12$ mm, IP 42, with clamping ring
	E2	$\varnothing 12$ mm, IP 65, with clamping ring
	L2	$\varnothing 12$ mm, IP 65
		<u>Pulse number - see table</u>
		<u>Voltage supply / signals</u>
		05A 5 VDC / antivalent (TTL compatible)
		24K 10...30 VDC / push-pull short-circuit proof
		25W 4.5...30 VDC / push-pull antivalent short-circuit proof

##### Through hollow shaft

BHG 16. 

		-		
--	--	---	--	--

	5	Connection Cable 2 m, radial
	A	Connector M23, radial
		<u>Through hollow shaft</u>
	B2	$\varnothing 12$ mm, IP 42, with clamping ring
	E2	$\varnothing 12$ mm, IP 65, with clamping ring
		<u>Pulse number - see table</u>
		<u>Voltage supply / signals</u>
		05A 5 VDC / antivalent (TTL compatible)
		24K 10...30 VDC / push-pull short-circuit proof
		25W 4.5...30 VDC / push-pull antivalent short-circuit proof

#### Pulse number

10	100	360	1250	5000
30	120	500	2000	
50	200	1000	2500	
60	250	1024	3600	

Other pulse numbers on request.

#### Trigger level

#### Accessories

##### Connectors and cables

10107687	Female connector M23, 12-pin, straight, without cable
10130367	Female connector M23, 12-pin, straight, 2 m cable
10118532	Female connector M23, 12-pin, straight, 5 m cable

##### Mounting accessories for BHF

10136635	Set of spring plate for encoders $\varnothing 58$ mm
10110616	Clamp set $\varnothing 15$ mm
10107540	Torque pin
10109520	Torque spring
10110574	Solid shaft reducer 12/6 mm
10112322	Solid shaft reducer 12/8 mm
10114472	Solid shaft reducer 12/10 mm

##### Mounting accessories for BHG

10136635	Set of spring plate for encoders $\varnothing 58$ mm
10110616	Clamp set $\varnothing 15$ mm
10107540	Torque pin
10109520	Torque spring

# Incremental encoders

---

<b>Outputs 05A</b>	<b>Complem. Linedriver RS422</b>
Output level High	>2.4 V (I = -20 mA)
Output level Low	<0.4 V (I = 20 mA)
Load High	<20 mA
Load Low	<20 mA

---

<b>Outputs 24K (25 Ω)</b>	<b>Push-pull short-circuit protection</b>
Output level High	>+Vs -3.7 V (I = -30 mA)
Output level Low	<2.5 V (I = 30 mA)
Load High	<30 mA
Load Low	<30 mA

---

<b>Outputs 25W</b>	<b>Push-pull complementary short-circuit protection</b>
Output level High	>+Vs - 3.7 V (I = -30 mA)
Output level Low	<2.5 V (I = 30 mA)
Load High	<40 mA
Load Low	<40 mA

**Blind or through hollow shaft  $\varnothing 12$  mm**  
**10...5000 pulses per revolution**

**BHF, BHG**

## Terminal assignment

### Cable

for connection reference -5

**05A, 25W**

**24K**

Core colour	Signals	Core colour	Signals
brown	+Vs	brown	+Vs
green	CHA	green	CHA
red	CHA compl.	–	–
yellow	CHB	yellow	CHB
blue	CHB compl.	–	–
pink	CHN	pink	CHN
grey	CHN compl.	–	–
white	0 V	white	0 V
Cable data	8 x 0.14 mm <sup>2</sup>	5 x 0.14 mm <sup>2</sup>	
Screen	connected to flange		

### Connector M23 male

for connection reference -A


**05A, 24K, 25W**

Connector	Signals
Pin 1	CHA compl.
Pin 2	+Vs
Pin 3	CHN
Pin 4	CHN compl.
Pin 5	CHB
Pin 6	CHB compl.
Pin 7	n.c.
Pin 8	CHA
Pin 9	Housing
Pin 10	0 V
Pin 11	0 V
Pin 12	+ Vs

## Output signals


Counter clockwise rotating direction when looking at the flange.

**05A, 25W**

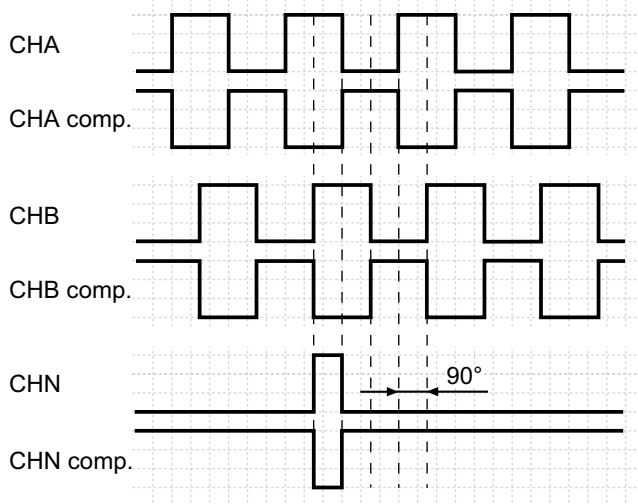


Counter clockwise rotating direction when looking at the flange.

**24K**

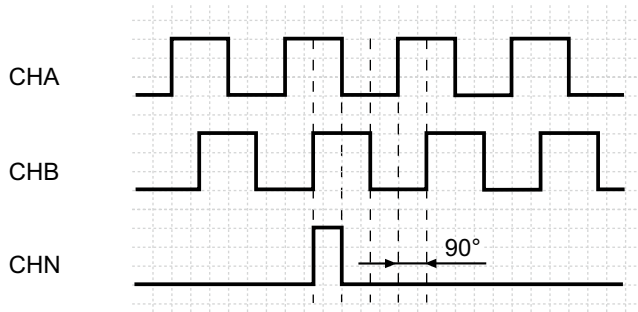

Push-pull version **24K** without CHx complementary signals




# Incremental encoders

Blind or through hollow shaft  $\varnothing 12$  mm  
10...5000 pulses per revolution


BHF, BHG

## Dimensions


### BHF cable radial

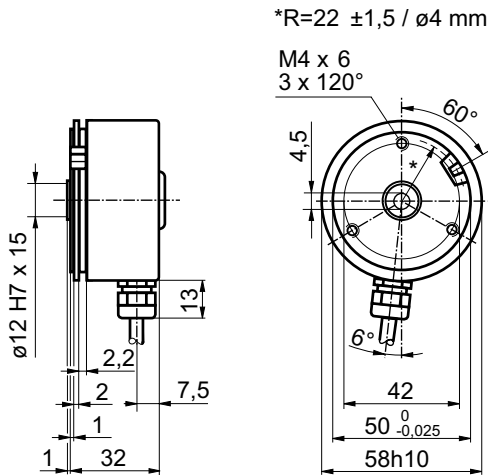


### BHF connector output radial

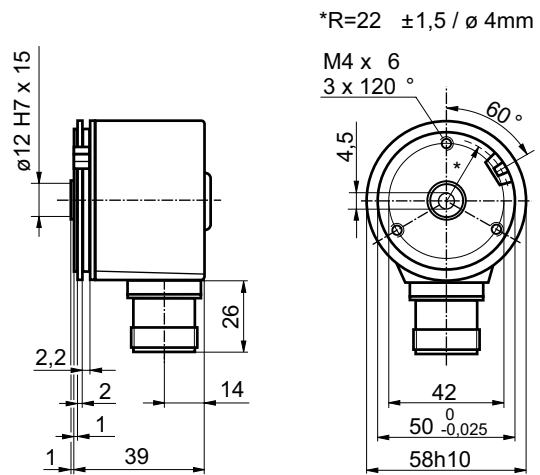


### BHG cable radial

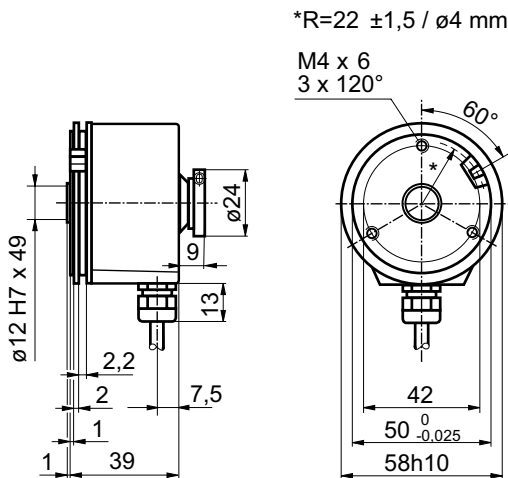

### BHG connector output radial

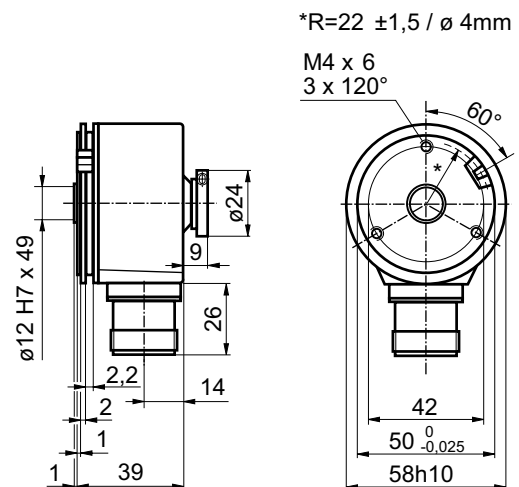

BHF/BHG connector dimensions

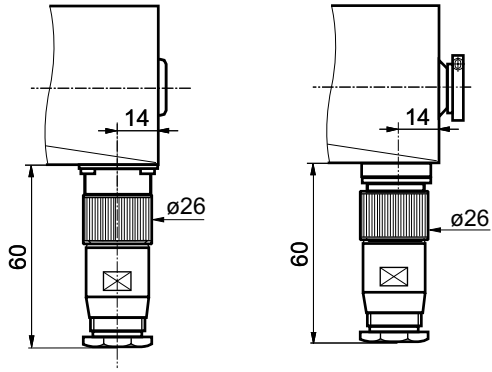

BHF/BHG clamping ring

