

## EAM300-SM6.5VC6.14180.A

Solid shaft with synchro flange, magnetic multiturn encoders 14 bit ST / 18 bit MT

Article number: 11257577

### Overview

- Encoder multiturn / CANopen®
- Precise magnetic sensing
- Angular accuracy up to  $\pm 0.15^\circ$
- Protection IP 65
- High resistance to shock and vibrations
- Electronic gear function
- Axial plug connection



### Technical data

#### Technical data - electrical ratings

Voltage supply	10...30 VDC
Consumption typ.	20 mA (24 VDC, w/o load)
Initializing time	$\leq 170$ ms after power on
Data currency	$< 1$ ms
Interface	CANopen®
Function	Multiturn
Profile conformity	CANopen® CiA communication profile DS 301, LSS profile DSP 305, device profile DS 406, DS 417
Steps per revolution	16384 / 14 bit
Number of revolutions	262144 / 18 bit
Absolute accuracy	$\pm 0.15^\circ$ (+20 $\pm 15^\circ\text{C}$ ) $\pm 0.25^\circ$ (-40...+85 $^\circ\text{C}$ )
Sensing method	Magnetic
Code sequence	CW: ascending values with clockwise sense of rotation (looking at flange)
Output stages	CAN-Bus, LV (3.3 V) compatible ISO 11898
Interference immunity	EN 61000-6-2
Emitted interference	EN 61000-6-3 (cable length $< 30$ m, no connection to DC network) EN 61000-6-4

#### Technical data - electrical ratings

Approval UL approval / E217823

#### Technical data - mechanical design

Size (flange)	$\varnothing 30$ mm
Shaft type	$\varnothing 6 \times 12$ mm solid shaft
Flange	Synchro flange
Protection EN 60529	IP 65 (without shaft seal)
Operating speed	$\leq 6000$ rpm
Starting torque	$\leq 0.75$ Ncm (+20 $^\circ\text{C}$ )
Moment of inertia	0.98 gcm <sup>2</sup>
Admitted shaft load	$\leq 10$ N axial $\leq 10$ N radial
Material	Housing: steel zinc-coated Flange: aluminium Shaft: stainless steel
Operating temperature	-40...+85 $^\circ\text{C}$ (see general information)
Relative humidity	95 %
Resistance	EN 60068-2-6 Vibration 30 g, 10-2000 Hz EN 60068-2-27 Shock 500 g, 1 ms
Weight approx.	150 g
Connection	Flange connector M12, 5-pin

### Optional

- Terminating resistor

## General information


Self-heating interrelated to speed, protection, attachment method and ambient conditions as well electronics and supply voltage must be considered for precise thermal dimensioning. Self-heating is supposed to approximate 6 K (standstill) and additionally for movement 1.5 K per 1000 rpm (IP 65) or 3.5 K per 1000 rpm (IP 67). Operating the encoder close to the maximum limits requires measuring the real prevailing temperature at the encoder flange.

## Terminal assignment

**Flange connector M12, 5-pin**  
for connection reference **-N** and **-V**

Pin	Signal
1	CAN_GND
2	+Vs
3	0 V
4	CAN_H
5	CAN_L

Screen: connected to housing



## CANopen® features


Operating modes	Time-driven (Event-Time) Synchronously triggered (Sync)
Node Monitoring	Heartbeat Node guarding
Programmable parameters	Operating modes Total resolution Scaling Electronic gear function
Diagnosis	Multiturn sensing Position error Temperature exceeding Speed exceeding
Default	50 kbit/s, Node-ID 1 (DS406)

# EAM300-SM6.5VC6.14180.A

Solid shaft with synchro flange, magnetic multiturn encoders 14 bit ST / 18 bit MT

Article number: 11257577

## Dimensions

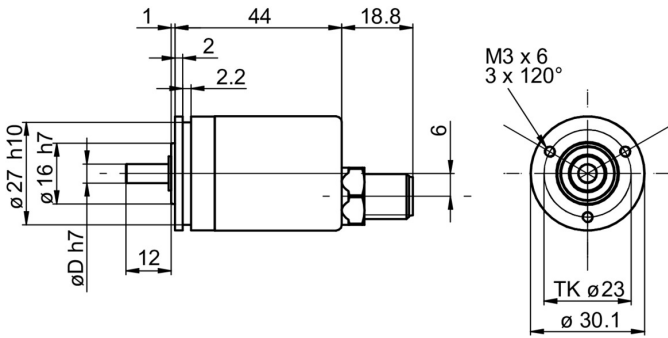

Flange connector M12, axial, IP 65

## EAM300-SM6.5VC6.14180.A

Solid shaft with synchro flange, magnetic multiturn encoders 14 bit ST / 18 bit MT

Article number: 11257577

### Accessories

#### Mounting accessories

10106004      Clamp set  $\varnothing$ 10 mm