

## Overview

- SmartReflect - Safe barrier principle without reflector
- Long-term stable detection of transparent objects thanks to compensation of environmental influences
- qTeach - tamper-proof, simple teach-in with ferromagnetic tool
- Robust housing with stainless steel spacer sleeves



Picture similar



## Technical data

### General data

Type	Light barrier
Version	Transparency object detection
Background position Sde	25 ... 180 mm
Scanning range Sa	90% ... 85% Sde
Minimal signal attenuation	10 %
Power on indication	LED green
Alignment / soiled lens indicator	Flashing output indicator
Output indicator	LED yellow
Sensing distance adjustment	qTeach
Distance to focus	160 mm
Suppression of reciprocal influence	Yes
Beam type	Point
Alignment optical axis	< 1,5°

### Light Source

Light source	Pulsed red laser diode
Laser class	1
Wave length	680 nm

### Electrical data

Voltage supply range +Vs	10 ... 30 VDC
--------------------------	---------------

### Electrical data

Current consumption max. (no load)	20 mA (@ 10 VDC)
Current consumption typ.	10 mA (@ 24 VDC)
Voltage drop Vd	<2 VDC
Output function	Light / dark operate
Output circuit	NPN complementary
Output current	50 mA
Short circuit protection	Yes
Reverse polarity protection	Yes

### Mechanical data

Width / diameter	8 mm
Height / length	25.1 mm
Depth	15.8 mm
Design	Rectangular
Mechanical mounting	Sleeve smooth (stainless steel)
Housing material	Plastic (ASA, PMMA)
Front (optics)	PMMA
Connection types	Flylead connector M8 4 pin, L=200 mm
Cable characteristics	PVC / PVC 4 x 0.08 mm <sup>2</sup>

### Ambient conditions


Protection class	IP 67
Operating temperature	-20 ... +50 °C

# O200.SL.T-NV1T.72NV/F160


SmartReflect Light barriers - miniature

Article number: 11231171

## Dimension drawing

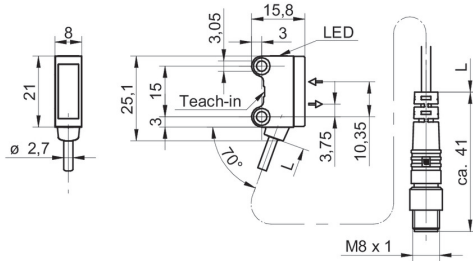

## Beam characteristic (typically)

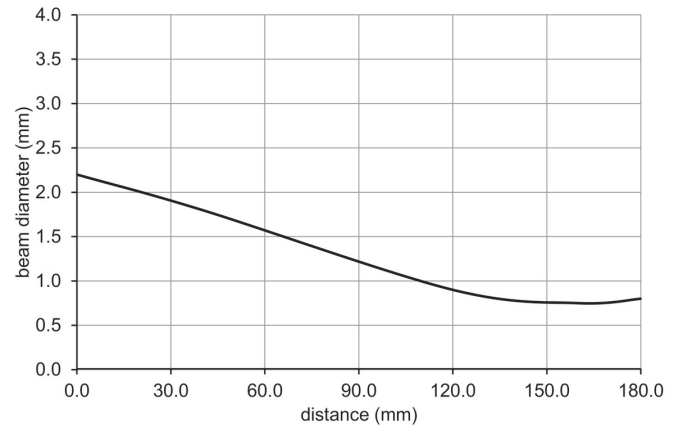


## Laser warning

**CLASS 1 LASER  
PRODUCT**

IEC 60825-1/2014

Complies with 21 CFR 1040.10 and 1040.11 except for conformance with IEC 60825-1 Ed. 3., as described in Laser Notice No. 56, dated May 8, 2019

## Connection diagram

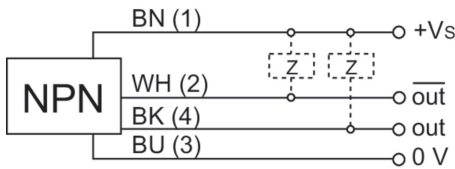

## Pin assignment

