

PP20S industrial

Pressure sensor with ceramic cell and industrial connection

PP20S-1.####R.####.####00.004

Overview

- Suitable for all kind of industrial application
- Frontflush pressure connection available for requirements of water applications and high viscosity media
- Standard use from -1 to 400 bar
- High accuracy over a wide temperature range (-40 ... 125 °C) due to active compensated temperature compensation
- Robust and Compact stainless housing for harsh environment conditions
- Abrasive resistant due to ceramic measurement cell
- Relative pressure and vacuum measurement
- Programmable by the FlexProgrammer 9701



Picture similar



Technical data

Performance characteristics

Pressure type	Relative (gauged)
Compensated temperature range	-10 ... 60 °C
Long term stability	≤ 0.2 % FSR/a
Max. measuring error	± 0.3 % FSR ± 0.5 % FSR ± 1.0 % FSR Including zero-point and span error, non-linearity (by terminal base line), hysteresis and non-repeatability (EN 61298-2)
Max. measuring span	400 bar
Max. turndown ratio	5 : 1
Measuring range	-1 ... 400 bar
Step response time	< 3 ms
Standard error of measurement (BFSL)	± 0.12 % FSR ± 0.2 % FSR ± 0.4 % FSR Including non-linearity, hysteresis and non-repeatability according BFSL
Min. measuring span	0.25 bar
Power-up time	< 50 ms
Temperature coefficient	≤ 0.05 % FSR/10 K , measuring span ≤ 0.05 % FSR/10 K , zero point

Process conditions

Process temperature	With NBR seal: -25 ... 100 °C @ -1 ... 400 bar With EPDM seal: -40 ... 125 °C @ -1 ... 160 bar -30 ... 100 °C @ 160 ... 400 bar With FKM seal: -10 ... 125 °C @ -1 ... 400 bar With FVMQ seal: -40 ... 125 °C @ -1 ... 160 bar
---------------------	--

Process conditions

Process pressure	Refer to section "Operating conditions"
------------------	---

Process connection

Connection variants	Refer to section "Dimensional drawings"
Wetted parts material	AISI 304 (1.4301) AISI 316L (1.4404) Ceramic, 96% AL2O3 NBR, optional EPDM, optional FKM, optional, gaskets require a minimum ambient temperature of -20 °C and a minimum medium temperature of -25 °C FVMQ, optional

Ambient conditions

Operating temperature range	Connector M12-A, 4-pin: -40 ... 105 °C , with voltage output -40 ... 115 °C , with current output @ voltage supply range 26.4 ... 35 V DC -40 ... 125 °C , with current output @ voltage supply range 11 ... 26.3 V DC Class OT6 (EN 50155) Connector DIN EN 175301-803 A (DIN 43650 A), 4-pin: -40 ... 90 °C
Storage temperature range	-40 ... 125 °C
Degree of protection (EN 60529)	IP65 , with connector DIN EN 175301-803 A (DIN 43650 A), 4-pin IP67 , with connector M12-A, 4-pin IP69K , with connector M12-A, 4-pin
Shock and vibration tests (EN 61373:1999, 2010)	Category 2 The respective most demanding severity levels of the issues 1999 and 2010 are applied in each Category 2

PP20S industrial

Pressure sensor with ceramic cell and industrial connection

PP20S-1.####R.####.####00.004

Technical data

Output signal

Current output	4 ... 20 mA , 2-wire 20 ... 4 mA , 2-wire
Voltage output	0 ... 10 V 1 ... 5 V 0 ... 5 V 0.5 ... 4.5 V
Load resistance	> 5 kΩ, with voltage output $R \leq (V_{DC} - 11 V)/0.023 A$, with current output
Short circuit protection	Yes

Housing

Style	Compact transmitter
Overall size	Refer to section "Dimensional drawings"
Material	AISI 304 (1.4301)

Electrical connection

Connector	M12-A, 4-pin DIN EN 175301-803 A (DIN 43650 A), 4-pin
-----------	--

Power supply

Voltage supply range	11 ... 35 V DC , with current output 14 ... 35 V DC , with 0 ... 10 V output signal 9 ... 35 V DC , with 1 ... 5 V output signal 9 ... 35 V DC , with 0 ... 5 V output signal 9 ... 35 V DC , with 0.5 ... 4.5 V output signal
----------------------	--

Current consumption (no load)	23 mA , max.
-------------------------------	--------------

Compliance and approvals

EMC	EN 61326-1 EN 61000-6-2 EN 61000-6-3
-----	--

Operating conditions

Measuring range (bar)		Proof pressure (bar)	Burst pressure (bar)
0 ... 0,25	0 ... 1		
-1 ... 0	-1 ... 0,6	0 ... 1,6	4
-1 ... 1	-1 ... 1,5	0 ... 2,5	6
0 ... 4	-1 ... 3		10
0...6	-1 ... 5		12
0 ... 10	-1 ... 9		15
0 ... 16	-1 ... 15		35
0 ... 25	-1 ... 24		50
0 ... 40	-1 ... 39	0 ... 60	100
0 ... 100			150
0 ... 160			200
0 ... 250	0 ... 400		350
			500
			650
(PSI)		(PSI)	(PSI)
0 ... 5	0 ... 15	0 ... 30	58
0 ... 60			145
0 ... 100	0 ... 160		217
0 ... 200			507
0 ... 400	0 ... 600		1450
0 ... 1000	0 ... 1500		2175
0 ... 3000	0 ... 6000		7250


PP20S industrial

Pressure sensor with ceramic cell and industrial connection


PP20S-1.####R.####.####00.004

Dimensional drawings (mm)

Housing

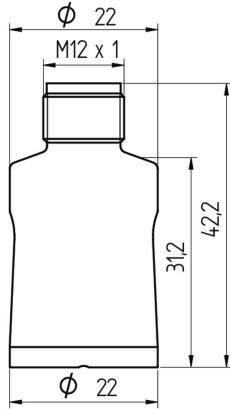


M12-A, 4-pin

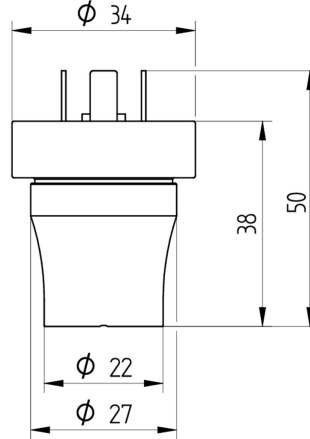


DIN EN 175301-803 A (DIN 43650 A), 4-pin


Process connection




G 1/4 B EN 837-1 (G30)




G 1/2 B EN 837-1 (G31)




G 1/4 A DIN 3852-E (G50)



G 1/2 A DIN 3852-E (G51)

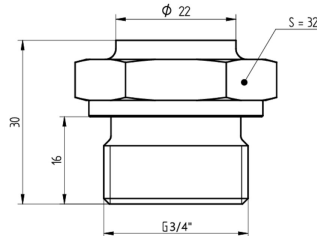

G 3/4 A DIN 3852-E (G57)



1/4 - 18 NPT (N01)

PP20S industrial

Pressure sensor with ceramic cell and industrial connection

PP20S-1.####R.####.####00.004

Electrical connection

Output signal	Equivalent circuit	Electrical connection	Function	Pin assignment
4 ... 20 mA (2-wire)			+Vs	1
			Iout	3
			Frame Ground	Plug thread
			n.c.	2, 4
			+Vs	1
			Iout	2
Frame Ground	Grounding lug			
0 ... 10 V (3-wire)			+Vs	1
			Uout	2, 4
			GND (0 V)	3
			Frame Ground	Plug thread
			+Vs	1
			Uout	3
GND (0 V)	2			
Frame Ground	Grounding lug			

PP20S industrial

Pressure sensor with ceramic cell and industrial connection

PP20S-1.####R.####.####00.004

Ordering information

Ordering key - Configuration possibilities see website

	PP20S	-	1	.	#	###	R	.	##	##	.	##	#	#	0	0	.	0	0	4
Product	PP20S																			
Housing material	SS 1.4301 AISI 304																			
						1														
Accuracy																				
	±1.0 % FS																			1
	±0.5 % FS																			3
	±0.3 % FS																			B
Measuring range																				
	0 ... 0.25 bar (EN)																			B10
	0 ... 1 bar (EN)																			B15
	0 ... 1,6 bar (EN)																			B16
	0 ... 2.5 bar (EN)																			B18
	0 ... 4 bar (EN)																			B19
	0 ... 6 bar (EN)																			B20
	0 ... 10 bar (EN)																			B22
	0 ... 16 bar (EN)																			B24
	0 ... 25 bar (EN)																			B26
	0 ... 40 bar (EN)																			B27
	0 ... 60 bar (EN)																			B29
	0 ... 100 bar (EN)																			B31
	0 ... 160 bar (EN)																			B33
	0 ... 250 bar (EN)																			B35
	0 ... 400 bar (EN)																			B38
	-1 ... 0 bar (EN)																			B59
	-1 ... 0,6 bar (EN)																			B72
	-1 ... 1 bar (EN)																			B73
	-1 ... 1,5 bar (EN)																			B74
	-1 ... 3 bar (EN)																			B76
	-1 ... 5 bar (EN)																			B77
	-1 ... 9 bar (EN)																			B79
	-1 ... 15 bar (EN)																			B81
	-1 ... 24 bar (EN)																			B82
	-1 ... 39 bar (EN)																			B1L
	0...5 psi (ANSI)																			H2N
	0...15 psi (ANSI)																			H15
	0...30 psi (ANSI)																			H17
	0...60 psi (ANSI)																			H19
	0...100 psi (ANSI)																			H21
	0...160 psi (ANSI)																			H22
	0...200 psi (ANSI)																			H23
	0...400 psi (ANSI)																			H26
	0...600 psi (ANSI)																			H27
	0...1000 psi (ANSI)																			H30
	0...1500 psi (ANSI)																			H31
	0...3000 psi (ANSI)																			H34
	0...6000 psi (ANSI)																			H38
Kind of pressure	Relative (gauged)																			R

PP20S industrial

Pressure sensor with ceramic cell and industrial connection

PP20S-1.####R.####.####00.004

Ordering information

Ordering key - Configuration possibilities see website

	PP20S	-	1	.	#	###	R	.	##	##	.	##	#	#	0	0	.	0	0	4
Output signal																				
20...4 mA										A0										
4...20 mA										A1										
0...10 V										A2										
1...5 V										A3										
0...5 V										A4										
0.5...4.5 V										A5										
Output Connection																				
M12-A, 4-pin																				14
DIN EN 175301-803 A (DIN 43650 A), 4-pin ⁽¹⁾																				44
Process connection																				
G 1/4 B EN 837-1 (G30)																				02
G 1/2 B EN 837-1 (G31)																				03
1/4-18 NPT (N01)																				04
G 1/4 A DIN EN ISO 1179-2(G50)																				06
G 1/2 A DIN EN ISO 1179-2(G51)																				09
G3/4 DIN3852-E front flush (G57)																				47
Process connection material																				
Stainless steel 1.4404 AISI 316L																				2
Stainless steel 1.4301 AISI 304																				4
Seal																				
NBR standard																				1
EPDM																				2
FKM																				3
FVMQ																				6
Oil filling																				
Without																				0
Configuration																				
No configuration																				0
ATEX																				
Without																				0
Approvals																				
Standard approvals																				0
Technology																				
Ceramic																				4

(1) Including female power connector with screwed terminals