

Overview

- Rectangular miniature sensor for tight spaces
- Lowest serial dispersion due to end-of-line calibration
- Robust even in demanding environments
- Temperature and long-term stable switching behavior
- PUR cable with high chemical resistance



Picture similar



Technical data

General data

Mounting type	Flush
Nominal sensing distance Sn	1 mm
Assured sensing distance Sa	≤ 81 % of Sn
Real sensing distance Sr	± 10 % von Sn
Temperature drift	± 10 % of Sr
Hysteresis	2 ... 20 % of Sr
Output indicator	LED red
Correction factor typ.	Mild steel 100 %, stainless steel 80 %, aluminum 60 %, copper 55 %
Reference object	Fe360 6 x 6 x 1 mm

Electrical data

Switching frequency	5 kHz
Voltage supply range +Vs	6 ... 30 VDC
Current consumption max. (no load)	12 mA
Output circuit	PNP break function (NC)
Voltage drop Vd	<2 VDC
Output current	200 mA
Short circuit protection	Yes
Reverse polarity protection	Yes

Mechanical data

Design	Rectangular
Material (sensing face)	LCP

Mechanical data

Housing material	Brass nickel plated
Dimension	6 mm
Housing length	20 mm
Connection types	Cable, L=2 m
Weight	19 g

Ambient conditions

Operating temperature	-25 ... +75 °C
Storage temperature	-25 ... +75 °C
Protection class	IP 67
Vibration resistance	IEC 60068-2-6:2008 10 g at f = 10 - 2000 Hz, duration 150 min per axis
Shock resistance	IEC 60068-2-27:2009 100 g / 6 ms, 10 jolts per axis and direction


Safe maximum values

MTTF	1388 years
Diagnostic coverage (DC)	0 %


Cable

Cable length	200 cm
Shielded	No
External sheath: Material	PUR
Cable diameter	2.8 mm
Wire cross section	0.095 mm ²
Insulation: Material	PP
Bending radius (fixed)	5 × outer diameter
Bending radius (mobile)	10 × outer diameter

Dimension drawing

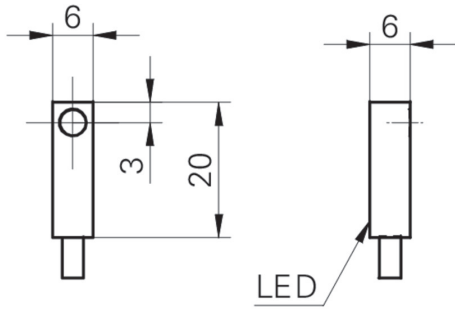

Connection diagram

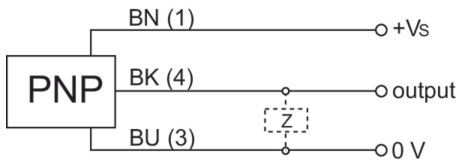

Response diagram

